

How to apply Magnetic Snap AK-28

EmmaCreation


Parts [A]




Parts [B]




[A-1] Apply fusible interfacing to back of fabric where magnetic snap will be installed. The size of interfaced area is about twice bigger than the snap. Mark a dot on the spot on right side of fabric where the pattern tells to place the snap.

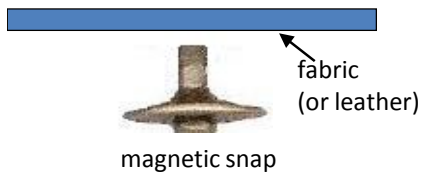


[B-1] Work on bottom snap. Apply interfacing. Mark a dot on the spot on right side of fabric where the snap will be installed. Make marks in the slits. Those marks are where holes need to be cut.

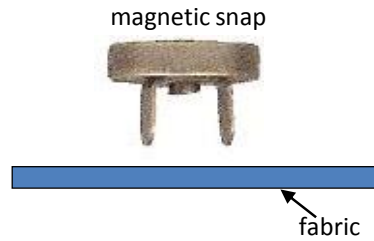


[A-2] Make a hole where you marked. Insert magnetic snap from right side of fabric.

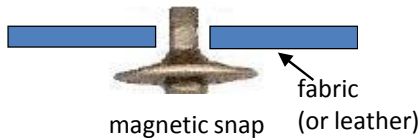


[B-2] Set the washer aside. Cut the slits open with seam ripper. Option: It will be extra strong to use buttonhole stitches on sewing machine to make slits.

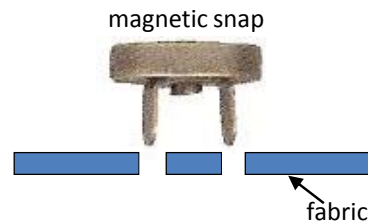


[A-3] Place magnetic snap on hard surface and insert rivet cap over the hole. Drive snap into rivet cap with hammer.

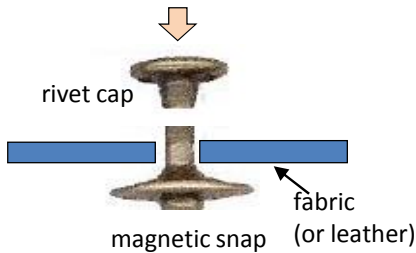

[B-3] Insert magnetic snap from right side of fabric. Place the washer on back of fabric. Prongs of snap are inserted through 2 slits in washer.

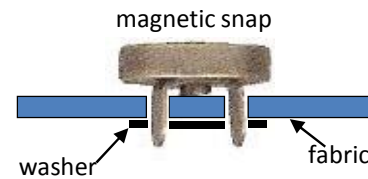

[A-4] This is how it looks when snap is installed.

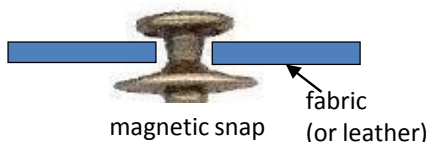

[B-4] Bend the prongs toward the middle of the magnet using some firm tool.

